

CHASSIS

B

# GLG 360 SP-T

Very powerful  
self-propelled all  
adaptable glass  
handler



Foam filled  
no flat tires

- Intelligent all adaptable glass handler for millimeter precise maneuverability of flat materials
- No Outriggers  
- less floor space required
- Drives through narrow passages down to 83,3cm /33"



GLG built-in vacuum system



± 90° turning and endless rotation  
of the center boom

SERVICE  
24 HOUR  
DELIVERY OF SPARE PARTS




We lift it up where it belongs!



## Technical specifications

Description	EU	US
Loading capacity w. 13 counterw.	360 kg	794 lbs
Own weight with counterw.	608 kg	1340 lbs
Own weight without counterw.	471 kg	1039 lbs
Max lifting height	2916 mm	114"
Telescopic range	600 mm	24"
Sideshift	± 11 degrees	
Battery specifications		
Charging current	230V	115V
Battery pack (std.)	24V / 159Ah	

## Lift accessories

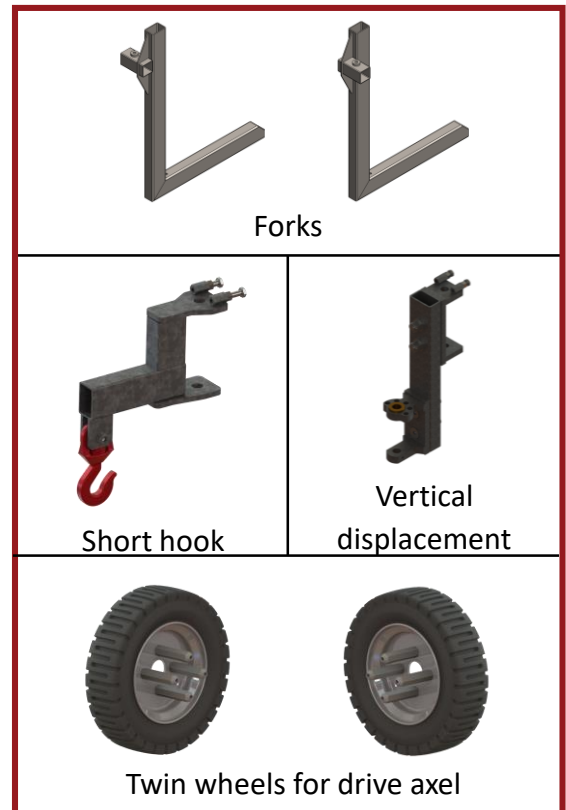

## Measurements

### Minimum

- Width: 833 mm
  - Without twin tires
- Height: 1333 mm
  - Transport position
- Length: 1950 mm
  - Transport position
- Lifting height: 0mm to 920 mm
  - Pick up from a table at



### Maximum

- Width: 1083 mm
  - With twin tires
- Lifting height: 2327 mm
  - Mounting vertical
- Lifting height: 2916 mm
  - Mounting horizontal

Specifications Our machines comply with the requirements of Machinery Directive 2006/42/EC, and are ASME B30.5, 5-1.1, 5-1.10 Compliant, ASME B30.20 Compliant, SAE-J1063 Compliant, and SAE-J765 Compliant.

Other standards met include:  
 DS/EN ISO 12100:2011 Safety of machinery – General principles for design  
 DS/EN ISO 4413:2010 Hydraulic fluid power  
 DS/EN 13155 + A2:2009 Cranes – Safety – Non-fixed load lifting attachment.

Much more information at [www.GlobalLiftGroup.com](http://www.GlobalLiftGroup.com)

**GLG Canada Ltd (North America)**  
 21332 Wilson Street, NOL 1E0  
 Delaware, Ontario, Canada  
 Phone: 1-855-779-3371

**European Head Office**  
 Soendergaarden 28  
 9640 Farsoe, Denmark  
 Phone: +45 75 72 72 15



[www.GlobalLiftGroup.com](http://www.GlobalLiftGroup.com)