# GLG 550 5P-30

Powerful, versatile, parallel lifting work horse with telescopic arm and 3D head lifting 550kg/1213 lbs.





100% parallel lift



The most secure vacuum system with two separate 200% systems.



The unique 3D head allows you to manipulate the load in any angle you wish - more than 4 meters up.



Battery indicator



Battery indicator and hour indicator for hours remaining before next service.



4 rugged tires are delivered as standard. Two can be dismounted if neccessary.



Foam filled no flat tires

All automotive parts are operated by hydraulics



The GLG all adaptable handlers are the most precise lifters in the world when combined with the extremely heavy loads.











### **Technical specifications**


Description	EU	US	Description	EU	US
Loading capacity			Height	1406 mm	55"
with counterweights	550 kg	1213 lb	Lifting height	3756 mm	148"
Own weight incl.		3375 lb	Lifting height horizont.	4128 mm	163"
20kg count. weights	1531 kg		Telescopic range	500 mm	20"
Axle load rear	714 kg	1574 lb	Sideshift	200 mm	8"
Axle load front	817 kg	1801 lb	Wheels Foam filled		
Pressure rear wheels	8,90 kg/cm <sup>2</sup>	127 lb/in <sup>2</sup>	Charging current	115 V/230 V	
Pressure front wheels twin mount	8,45 kg/cm²	120 lb/in²	Battery (std.)	24 V / 263AH (	2x12V]
Width	796 mm	31"	Charging time 30% to 100% 230V	App. 7 hours	
Width twin wheels	1163 mm	46"	30% to 100% 230V	App. 7 Hours	
Length	2335 mm	93"			

## Lifting diagramme



# Measurements

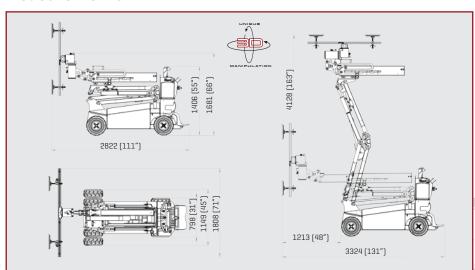



### **Accessories**



SpecificationsOur machines comply with the requirements of Machinery Directive 2006/42/EC, and are ASME B30.5, 5-1.1, 5-1.10 Compliant, ASME B30.20 Compliant, SAE-J1063 Compliant, and SAE-J765 Compliant.

Other standards met include:

DS/EN ISO 12100:2011 Safety of machinery - General principles for design. DS/EN ISO 4413:2010 Hydraulic fluid power.

DS/EN 13155 + A2:2009 Cranes - Safety - Non-fixed load lifting attachment.

# Much more information at www.glgsales.com

#### GLG Canada Ltd (North America) 21332 Wilson Street, NOL 1EO Delaware, Ontario, Canada

Phone: 1-855-779-3371

Soendergaarden 28 9640 Farsoe, Denmark Phone: +45 75 72 72 15

